


FOAMLITE® P (PP)

Foamlite® P offers 30% less weight with better mobility than similar products and excellent UV and moisture resistance.

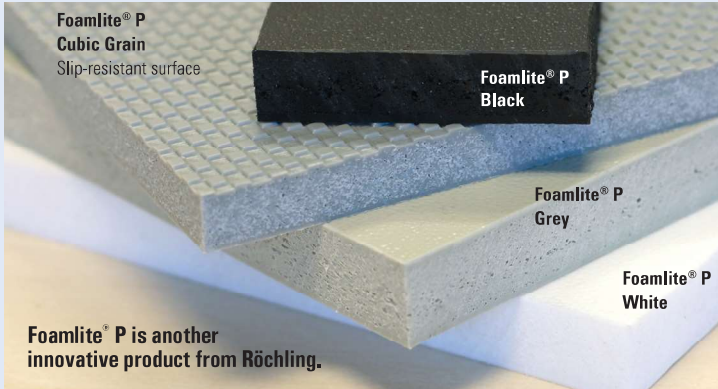

30% less weight
than traditional
materials

Foamlite® uses Röchling closed-cell, foamed technology.

APPLICATIONS



PRODUCT FEATURES



lightweight but
strong material



high chemical
resistance



UV and moisture
resistant



weldable and glueable



wood alternative in
high moisture
applications

Foamlite® P integrated hinges
**bend more than
40,000 times**

Create them with a simple router to
replace metal hinges on tank hoods.



Foamlite® P (PP) Sheets:

- Colors: Röchling Black, Grey, White and FDA Blue
- Thickness: 6 mm to 21 mm
- Surface finishes: Embossed/ Embossed or Cubic Grain/Embossed
- Sheet Sizes: Standard stocking size 2000mm x 3048 mm (78.74" x 120")
- Other colors and sheet sizes available

For more product information:

Röchling Engineering Plastics • 704 922-7814 • info@roechling-plastics.us

© 2018 Röchling Engineering Plastics. All rights reserved.